

Installation Guide: Rain Cover Doppio for Bakfiets.nl


Check out our guide for easy assembly



Clarijs



- Measure the center of the bracket and measure the center of the front of the box. Screw the bracket onto the box, 2cm below the edge.
- Take the straight section of the frame and slide it into the tunnel on the right, then through to the second tunnel that follows ahead. Next, take the curved section of the frame and slide that into the tunnel as well until it clicks into place with the other section.

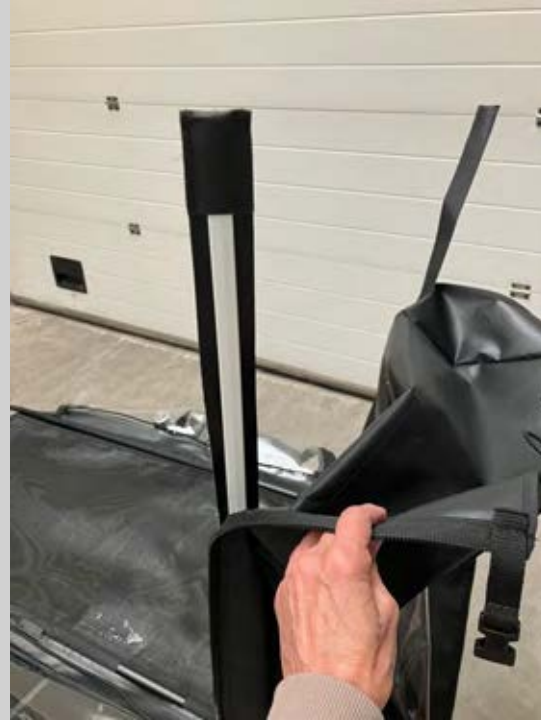

- Insert the tent pole between the inside of the tent and the pocket.
- Bend the sail batten until the top section can be pushed into the pocket.
- Use pliers to flatten the rubber hose section slightly.
- Squeeze the end of the pocket containing the sail batten firmly and, using a sturdy surface for support, try to insert the pocket and sail batten into the rubber tube section.
- The last photo shows the position of this part of the rain cover.



Now place the rain cover over the playpen, ensuring that the cover fits snugly around the corners, then fasten the side straps and tighten them as much as possible. Then zip the cover closed. Now measure the positions for the elastic holders on the steering side as shown in the photo (centre is 7 cm) and mark these out. Screw the elastic holders onto the box. Mark the correct position of the press studs on the front so that the counterpart can be screwed onto the box.